




RODIX, Inc.

RODIX, INC.
 2303 23rd Ave.
 Rockford, IL 61104
 Phone: (815) 316-4700
 (800) 562-1868
 Fax: (815) 316-4701

RODIX Web Site: www.rodix.com E-Mail: custserve@rodix.com

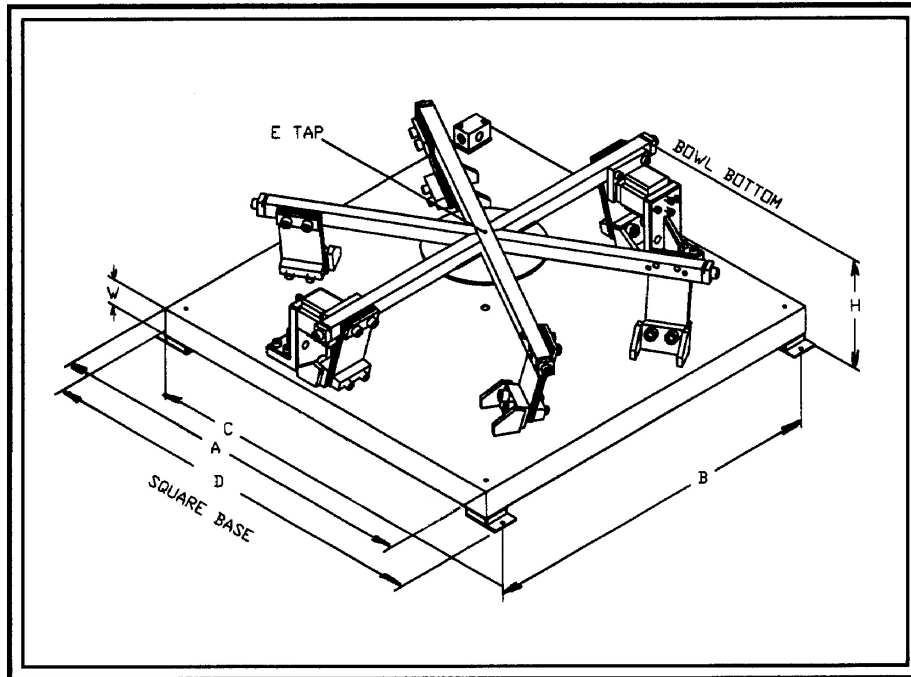

DRIVE BASE BASIC DIMENSIONS

| | |
|----------------------|----------|
| BASE <A> | 30 |
| MTG. | 27.25 |
| MTG. <C> | 31.50 |
| MTG. <D> | 32.50 |
| HEIGHT <H> | 11.0 |
| TAP <E> | 3/8-16 |
| BASE <W> | 2" |
| AVG/MAX BWL. & PP WT | 167/250# |
| APPX. WT. | 740# |

**30" CW BOWL DRIVE BASE
 (6) POSTS - (2) COILS**

SPARE PARTS:

COIL OPTIONS:

120 VAC: P/N 6-42-81

240 VAC: P/N 6-42-89

SPRING OPTIONS:

1/8" THK P/N 90-3-07

3/16" THK P/N 90-3-06

1/4" THK P/N 90-3-105

5/16" THK P/N 90-3-135

3/8" THK P/N 90-3-120

SPACERS:

UPPER SPACER: P/N 88-3-61

LOWER SPACER: P/N 88-3-65

MOUNTING FEET: P/N 96-1-12

TOE CLAMP OPTIONS:

Standard: P/N 53-1-16

Deep Step: P/N 53-1-15

PART NUMBERS:

STANDARD CONFIGURATION:

120 VAC: P/N 26-202-09

240 VAC: P/N 26-202-39

DOUBLE TOE CLAMP:

120 VAC: P/N 26-202-166

240 VAC: P/N 26-202-168